# PRODUCT DESCRIPTIONS





Central Paging System for LNG, Off-shore, Plant and Crane. Page/Party function with In-outdoor and Hazardous Area

### **GENERAL DESCRIPTION**

Talk Back System enables free broadcasting and telecommunication in a particular area such as deck and machinery areas in the offshore. All substations can be connected to the PAGA and the PABX system as well.

Substations include four types: Flush, wall waterproof and explosion-proof types, all of which can be interfaced to the Horn/Bell/Flashing Light, and the Foot Switch. This system has the function for both call in all and call in group and of the automatic switch of power for the main and the emergency situations. The system was tested at the IEC60945 standard and approved for CE.

### Regulations:

- 1. IEC 60079-0 (Explosive atmospheres 0 : Equip. general requirements)
- 2. IEC 60079-1 (Explosive atmospheres 1: Equipment protection by flameproof enclosures)
- 3. IEC 60945 (Maritime navigation and radio communication equipment)
- 4. ISO 9001 (DNV Management System Certificate)

### **System Features**

- Max. 11 Sub-station, Interface with PAGA and I.S. System
- Dry Contact Output Function for Horn, Bell, Flashing Light at Sub-Station
- All / Group Call and Priority Function (Pre-set Assigned)
- Main / Emergency Power Source Change automatically











WT/Flush Handset St Ceiling Speaker



W.T/Wall Handset



Main Cabinet

# **Electric Specifications: Main Amplifier Unit**

- 1. Power Output: 200W / 400W / 800W, etc
- 2. Frequency Characteristics: Less than 6dB (300 ~ 10kHz)
- 3. Input Sensitivity: More than 36dBm
- 4. Distortion Ratio: Less than 5%
- 5. S/N Ratio: More than 50 dB
- 6. Source of Power: AC100 / 240V(50/60Hz), DC24V
- 7. Power Consumption: Max. 20A, 250W (DC 24V) Max. 2.5A, 250W (AC 220V)
- 8. Input Fuse: AC 30A, DC 30A (In case of 250W)
- 9. Operating Temperature Range: -15°C ~ +55°C

BCC


10. Operating Humidity: Less than 90%


# **Priority of Broadcasting**

This system is operated in the following order (This can be changed by demands)

- 1. Microphone in the external public address system
- 2. Remote station microphone broadcasting
- 3. Main Microphone
- 4. Substation

### Talk Back System Interface with PA



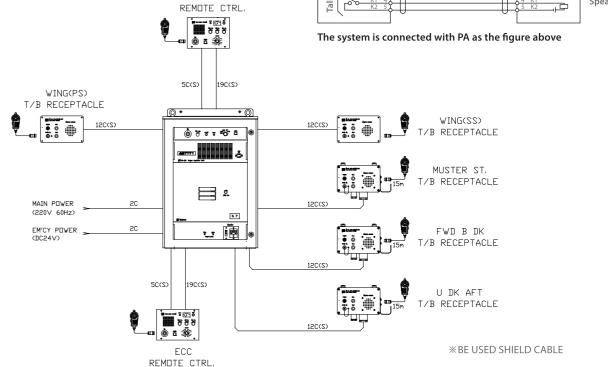

[Talk Back/Paging System for Plant]